



Part of Prismo Global

High performance industrial flooring solutions



PFAS Free



Max UV Protection




Hardwearing and vibrant flooring for warehouses, factories, car parks and beyond

- ✓ For diverse internal environments and performance needs
- ✓ Fast-drying with excellent adhesion and durability
- ✓ Lasting resistance to oils/fuels, salts and chemicals

Two-component flooring paints

Superior durability and resistance for high-traffic zones with forklifts, trucks and heavy machinery.

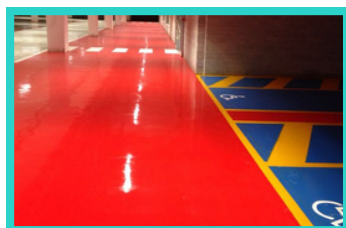

Uniepox™ Solvent based Epoxy-polyamide paint

- Semi gloss finish
- Concrete
- Floor coating and lining
- Maximum chemical, oil and wear resistance
- Can also be applied as a thin-film dust-proof coating system



HACCP certified for food industry

Epox All'Aqua Water based Epoxy-polyamide paint


- Semi gloss finish
- Concrete
- Floor coating and lining
- Maximum chemical, oil and wear resistance
- Eco-friendly and high performance water based formula



AETEC certified for durability

Epoline™ Solvent based Modified epoxy paint

- Matt finish
- Asphalt, concrete, stone and porphyry
- Floor coating and lining
- Excellent durability and resistant to salts, oils and chemicals
- Aromatic free

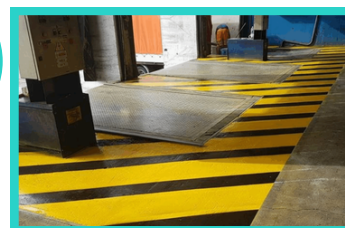

Polisol™ Solvent based Polyurethane paint

- Semi gloss finish
- Concrete
- Floor coating and lining
- High durability, oil and chemical resistance
- Adapts flexibly to low and fluctuating temperatures




One-component flooring paints

Fast-drying and easy-to-apply for quick turnarounds in light to medium traffic.



Lucido™ Solvent based Pure acrylic paint

- Matt finish
- Pre-primed asphalt and concrete
- Floor coating and lining
- Good durability, chemical and oil resistance

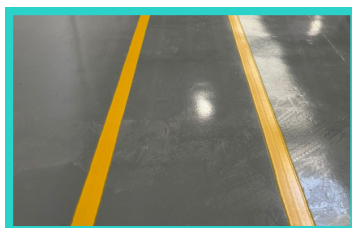

Prismo Epoxyline® Solvent based Pure epoxy-ester paint

- Matt finish
- Pre-primed asphalt and concrete
- Area marking and lining
- Good durability
- High chemical and oil resistance

Supporting Products

40+
Years
Paint Expertise

Acrylic Transparent Paint

- Solvent based, high gloss topcoat that seals in colour, resists dirt and extends durability.

Universal Primer Sealer

- Solvent based, non aromatic primer and high gloss topcoat. Dual function for simplified inventory and on-site logistics.

Range of Primers & Thinners

- Fast-setting primers for pre-treating surfaces.
- Solvent based thinners that enable easy dilution and efficient equipment cleaning.

Typical drying times (20 - 25°C)

Product	Open to light traffic	Open to heavy traffic	Full cure
Uniepo ^x ™	2 days	7 days	28 days
Epo ^x All'Aqua	2 days	8 days	12 days
Epo ^x line™	2 hours	1 day	1 - 3 days
Poliso ^l ™	4 - 5 hours	1 day	7 days
Lucido™	30 minutes	-	2 hours
Prismo Epoxyline®	30 minutes	-	1 day